

Product Data Sheet

DIN 41612 straight spring-loaded connector (Female), straight type, type F, flat,
Part No. 110-66065

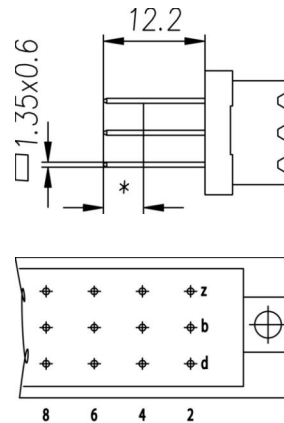


Illustration similar



Parallel



Perpendicular



Press-fit



Power



Rugged

- tail length 12.2 mm
- with a contact area in performance level 2
- number of positions: 48
- press-fit technology
- performance level 2



» to product on www.ept.de



» to product group DIN 41612

Product Data Sheet

DIN 41612 straight spring-loaded connector (Female), straight type, type F, flat,
Part No. 110-66065



Technical Specifications

Basics

Specification	IEC 60603-2 (DIN 41612)
Performance Level	2
No. of Contacts	48
Termination Technology	press-fit technology
Termination Length	12.2 mm
Board-to-Board Distance	24.4 mm
Operating Temperature Range	-55°C to +125°C

Material

Insulator Material	glass-fiber reinforced PBT, UL 94 V-0
CTI value <i>IEC 60112</i>	200
Contact Material	copper alloy

Mechanical

Pitch	5.08 x 3.81 mm
Mating Force	75 N
Separating Force per Pin	>0.2 N
Durability	400 mating cycles

Electrical

Operational Current	5.6 A
Test Voltage	1550 V
Contact Resistance	15 mΩ
Clearance and Creepage	W: ≥ 3.0 mm, L: ≥ 1.6 mm
Insulation Resistance	>10 ⁶ MΩ

Approval / Compliance

UL file	E130314
Environment	RoHS compliant

Product Data Sheet

DIN 41612 straight spring-loaded connector (Female), straight type, type F, flat,
Part No. 110-66065



Derating Diagram




Product Data Sheet

DIN 41612 straight spring-loaded connector (Female), straight type, type F, flat,
Part No. 110-66065



Hole Specifications

Plated through-hole according to IEC 60352-5



Material	chem. Sn Leiterplatten
Nominal Hole	Ø 1.6 mm
A PCB Thickness	min. 1.44 mm
B Plated Hole	Ø 1.6 +0.09 / -0.06 mm
C Drill Hole	1.75 ±0.025 mm
D Cu Plating	min. 25 µm
E Surface	chem. Sn Schicht, max. 1.5 µm
F Annular Ring	min. 0.1 mm

Material	Ni, Au Leiterplatten
Nominal Hole	Ø 1.6 mm
A PCB Thickness	min. 1.44 mm
B Plated Hole	Ø 1.6 +0.09 / -0.06 mm
C Drill Hole	1.75 ±0.025 mm
D Cu Plating	min. 25 µm
E Surface	Ni, Au Schicht, 0.05 - 0.2 µm Au über 2.5 - 5 µm Ni
F Annular Ring	min. 0.1 mm

Material	rein Cu Leiterplatten
Nominal Hole	Ø 1.6 mm
A PCB Thickness	min. 1.44 mm
B Plated Hole	Ø 1.6 +0.09 / -0.06 mm
C Drill Hole	1.75 ±0.025 mm
D Cu Plating	min. 25 µm
E Surface	OSP*, z.B. GLICOAT-SMD (F2) mit 0.12 - 0.15 µm
F Annular Ring	min. 0.1 mm

Material	HAL Sn Leiterplatten
Nominal Hole	Ø 1.6 mm
A PCB Thickness	min. 1.44 mm
B Plated Hole	Ø 1.6 +0.09 / -0.06 mm
C Drill Hole	1.75 ±0.025 mm
D Cu Plating	min. 25 µm
E Surface	HAL Sn, 5 - 15 µm
F Annular Ring	min. 0.1 mm

Product Data Sheet

DIN 41612 straight spring-loaded connector (Female), straight type, type F, flat,
Part No. 110-66065



Modifications

Available on request

- without mounting flange
- Special lengths for connections
- Grade I + III or custom
- custom loading

Drawings

Component data in 2D and 3D format you can download here:

[» PDF](#)

[» 3D IGES](#)

[» 3D STEP](#)

[» 3D PDF](#)