

Product Data Sheet

DIN 41612 90° Male, type H7/F24,
Part No. 117-40164



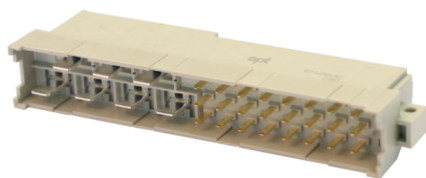


Illustration similar



Perpendicular



Through Hole



Power



Rugged

- tail length 3.1 mm
- number of positions: 7 + 24
- leading contact at pos. Z32
- solder termination
- performance level 1



» to product on www.ept.de



» to product group DIN 41612

Product Data Sheet

DIN 41612 90° Male, type H7/F24,
Part No. 117-40164



Technical Specifications

Basics

Specification	IEC 60603-2 (DIN 41612)
Performance Level	2
No. of Contacts	7 + 24
Termination Technology	solder termination
Termination Length	3 mm
Operating Temperature Range	-55°C to +125°C

Material

Insulator Material	glass-fiber reinforced PBT, UL 94 V-0
CTI value <i>IEC 60112</i>	200
Contact Material	copper alloy

Mechanical

Pitch	5.08 x 3.81 mm
Separating Force per Pin	> 0.2 N
Durability	400 mating cycles

Electrical

Operational Current	15 A, 5.6 A
Contact Resistance	8 mΩ, < 15 mΩ
Insulation Resistance	> 10 ⁶ MΩ

Processing

Soldering Temperature	up to 260°C
-----------------------	-------------

Approval / Compliance


UL file	E130314
Environment	RoHS compliant

Product Data Sheet

DIN 41612 90° Male, type H7/F24,
Part No. 117-40164





Derating Diagram

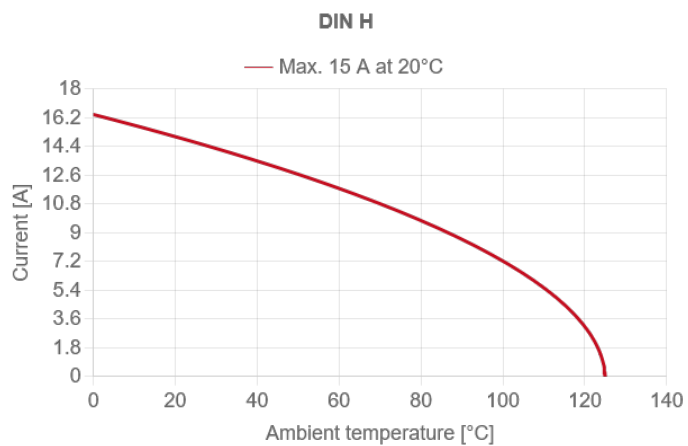

Options

Board Lock 90°

Suitable for connectors with type B, C, D, E, F, G male connectors and R female connectors



Type of Insertion	Forces			PCB Thickness	Part Number
	F _m	not soldered F _h	soldered F _h		
Locked	< 30 N	> 10 N	> 20 N	≤ 1.6 mm	117-40164C1
Under Tension	< 30 N	> 7.5 N	> 20 N	> 1.6 mm	

Drawings

Component data in 2D and 3D format you can download here:

» PDF

» 3D IGES

» 3D STEP

» 3D PDF